


SECTION A-A

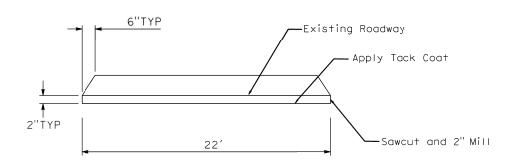


SECTION B-B


NOTE:


1- Tack coat shall be applied to all horizonal and vertical surfaces.

COUNTY OF RIVERSIDE TRANSPORTATION DEPARTMENT

SPEED BUMP

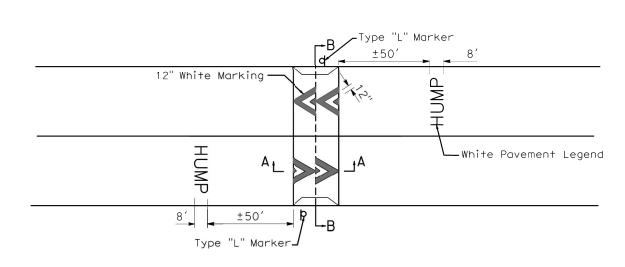

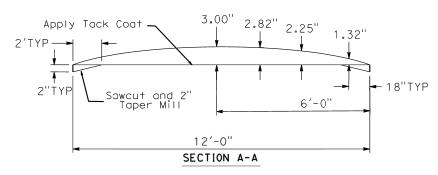

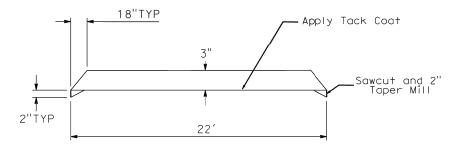

SECTION B-B

NOTES:

- 1. A "Speed Hump" (W17-1) shall be placed at 250^{\prime} to the hump location. Signs shall be of high intensity sheeting (30"x30"). Co-mount a W13-1 "25 MPH" (24"x24") warning sign per CALTRANS standards.
- 2- Tack coat shall be applied to all horizonal and vertical surfaces.

COUNTY OF RIVERSIDE TRANSPORTATION DEPARTMENT

SPEED HUMP