


**SECTION "A"**

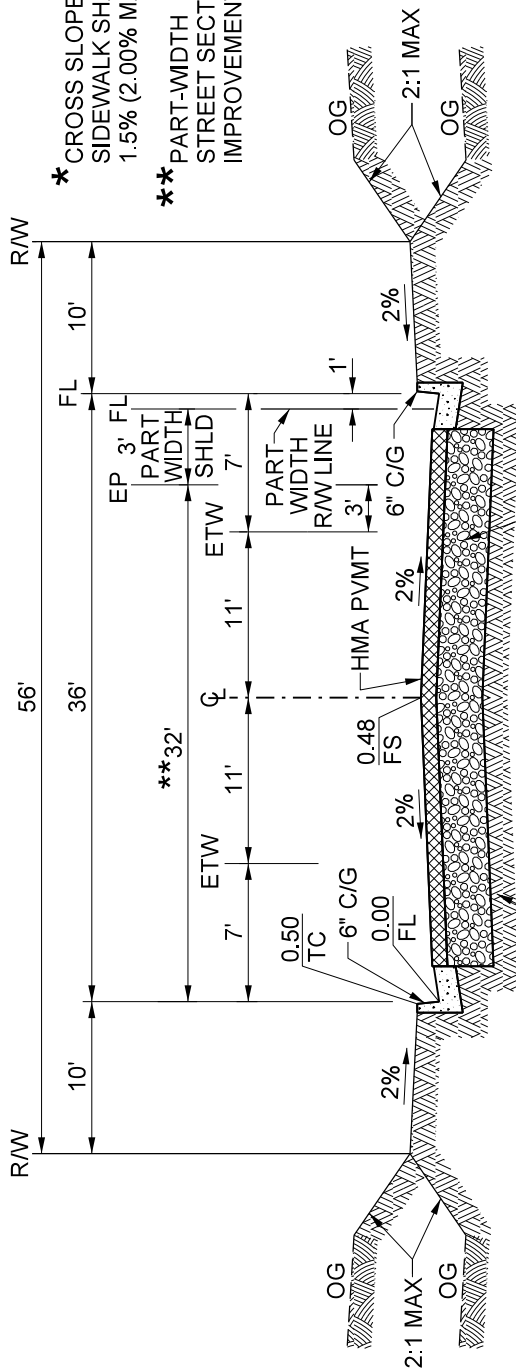

**SECTION "B"**

\* CROSS SLOPE OF SIDEWALK SHALL BE 1.5% (2.00% MAX AS-BUILT)  
 \*\* PART-WIDTH STREET SECTION: 32' IMPROVEMENTS ON 45' R/W

**NOTES:**

1. THICKNESS OF AB AND HMA TO BE DETERMINED BY SOIL TEST AT TIME OF GRADING OPERATIONS.
2. MINIMUM PAVING THICKNESS PER SPECIFICATIONS SECTION 8.07 OF THIS ORDINANCE.
3. CURB AND GUTTER TO BE TYPE "A-6" (STANDARD No. 200). 8" CURB IS NOT ALLOWED.
4. FOR UNDERGROUND UTILITY LOCATIONS SEE STANDARD No. 817.
5. ROADWAY CROSS-SECTION LESS THAN 40 FT IN WIDTH IS LIMITED TO PARKING ON ONE SIDE OF THE STREET.

NOT TO SCALE

PREPARED UNDER THE SUPERVISION OF:

*Mark Lancaster*

11/30/22  
DATE

DIRECTOR OF TRANSPORTATION  
MARK LANCASTER, P.E.



COUNTY OF RIVERSIDE

**SHORT  
LOCAL STREET  
(56' R/W)**

**STANDARD No. 105B**

REVISION	DESCRIPTION	MARK	DATE	APPROVED