


**SECTION "A"**

32' PAVED / 48' GRADED / 60' R/W

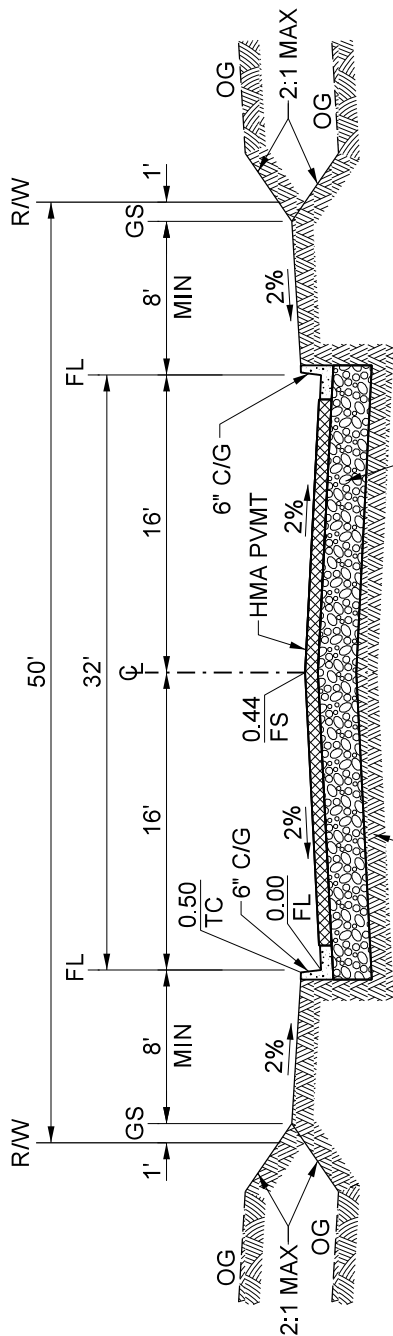

**SECTION "B"**

32' PAVED / 48' GRADED / 50' R/W

**NOTES:**

1. THICKNESS OF AB AND HMA TO BE DETERMINED BY SOIL TEST AT TIME OF GRADING OPERATIONS.
2. MINIMUM PAVING THICKNESS PER SPECIFICATIONS SECTION 8.07 OF THIS ORDINANCE. FOR ACCESS ROADS, IF THE ULTIMATE ROAD CLASSIFICATION IS A GENERAL PLAN HIGHWAY, THE TRAFFIC INDEX REQUIREMENT IS 7.0.
3. SEE STANDARD No. 212 FOR HMA DIKE DETAIL AND REQUIREMENTS.
4. FOR ACCESS ROAD 6" HMA DIKE MAY BE REQUIRED ON ONE OR BOTH SIDES.
5. CURB AND GUTTER TO BE TYPE "A-6" (STANDARD No. 200). 8" CURB IS NOT ALLOWED.
6. ROADWAY CROSS-SECTION LESS THAN 40 FT IN WIDTH IS LIMITED TO PARKING ON ONE SIDE OF THE STREET.

NOT TO SCALE

PREPARED UNDER THE SUPERVISION OF:

*Mark Lancaster*

11/30/22  
DATE

DIRECTOR OF TRANSPORTATION  
MARK LANCASTER, P.E.



COUNTY OF RIVERSIDE

**ACCESS ROAD,  
CONSTRAINED LOCAL  
STREET OR PRIVATE STREET  
(50'-60' R/W)**

**STANDARD No. 106**

| REVISION | DESCRIPTION | MARK | DATE | APPROVED |
|----------|-------------|------|------|----------|
|          |             |      |      |          |
|          |             |      |      |          |
|          |             |      |      |          |