



**SECTION**

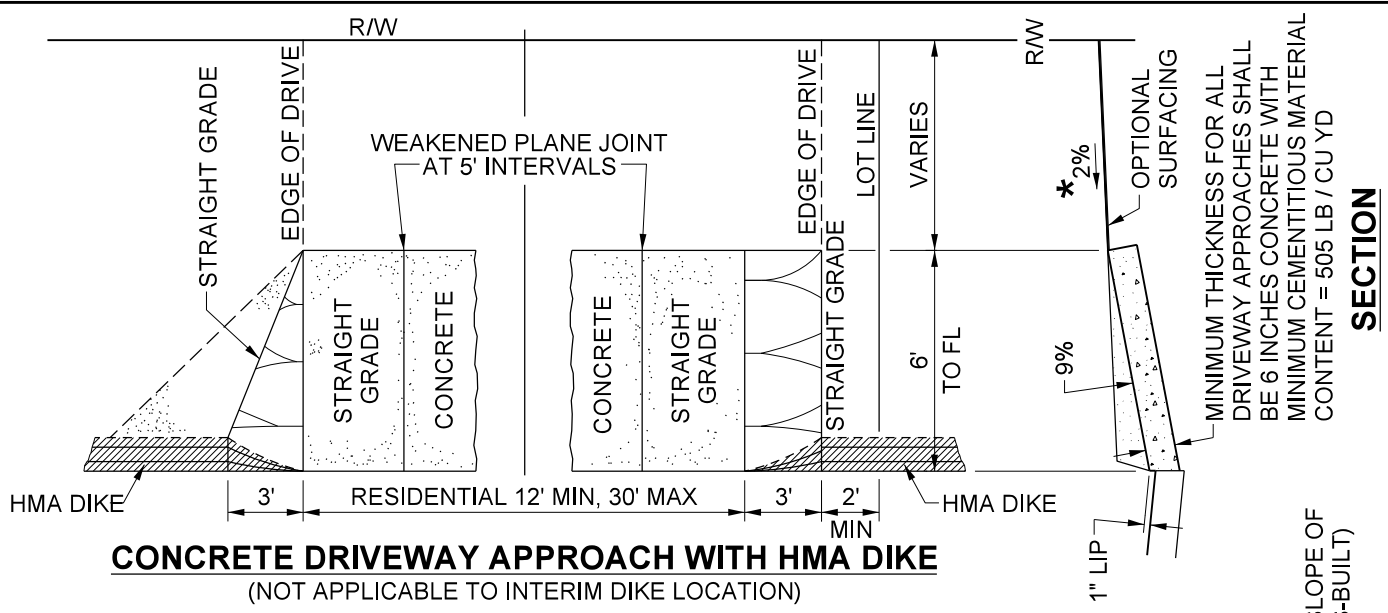

**CONCRETE DRIVEWAY APPROACH WITH HMA DIKE**  
(NOT APPLICABLE TO INTERIM DIKE LOCATION)

MINIMUM THICKNESS FOR ALL DRIVEWAY APPROACHES SHALL BE 6 INCHES CONCRETE WITH MINIMUM CEMENTITIOUS MATERIAL CONTENT = 505 LB / CU YD

\* IF SIDEWALK IS CONSTRUCTED CROSS SLOPE OF SIDEWALK SHALL BE 1.5% (2.00% MAX AS-BUILT)

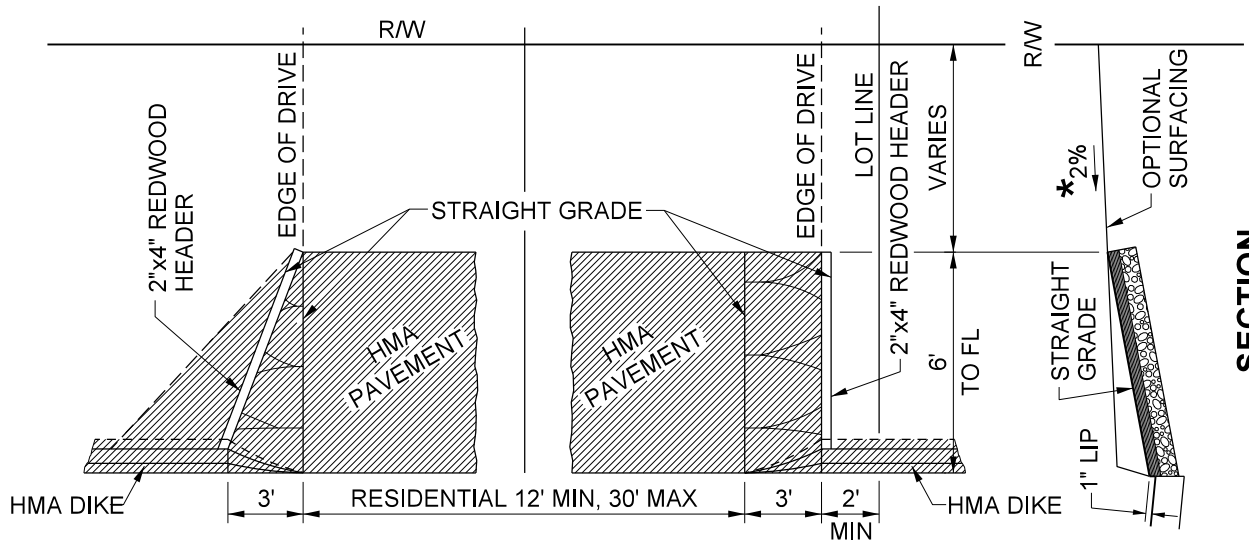


**HOT MIX ASPHALT DRIVEWAY APPROACH WITH HMA DIKE**

**NOTES:**

1. ALL CONSTRUCTION SHALL BE 2-1/2" MIN THICKNESS HOT MIX ASPHALT ON 4" MIN THICKNESS CLASS 2 OR CLASS 3 BASE, OR 3-1/2" THICKNESS HMA ON NATIVE SOIL.
2. 20' OF FULL HEIGHT DIKE REQUIRED BETWEEN DRIVEWAYS WITHIN ANY ONE PROPERTY UNLESS OTHERWISE PERMITTED.
3. RELATIVE COMPACTION OF SUBGRADE UNDER DRIVEWAYS SHALL BE 95% MINIMUM.
4. CONCRETE MINIMUM CEMENTITIOUS MATERIAL CONTENT = 505 LB / CU YD.

APRON TO BE CONSTRUCTED OF SAME MATERIAL AS DRIVEWAY WHEN STREET GRADIENT EXCEEDS 4%

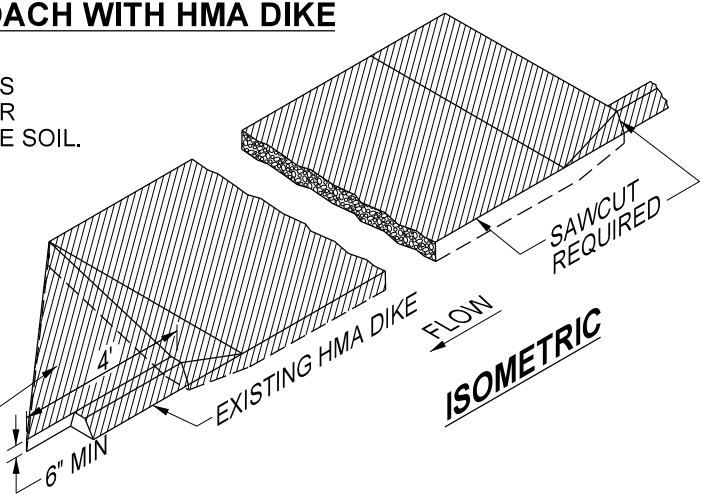

NOT TO SCALE

PREPARED UNDER THE SUPERVISION OF:

*Mark Lancaster* 11/30/22  
 DIRECTOR OF TRANSPORTATION DATE  
 MARK LANCASTER, P.E.

REVISION	DESCRIPTION	MARK	DATE	APPROVED



COUNTY OF RIVERSIDE

**RESIDENTIAL DRIVEWAY WITH HMA DIKE**

STANDARD No. 206